

Item No. _____
 Quantity _____



BEVERAGE-AIR

COMMERCIAL REFRIGERATION EQUIPMENT

GENERAL SPECIFICATIONS

**BOTTOM MOUNTED
 REACH-IN
 REFRIGERATORS**

K-Series / RI18

MODELS:

- KR12
- KR24
- KR36
- KR48
- KR74
- RI18

CONSTRUCTION:

Heavy duty construction includes stainless front (doors and grilles) with #3 finish. Exterior sides are steel with gray finish. Exterior top, back, and bottom are galvanized steel. Exterior mounted thermometer is digital type. Interior of cabinet is white coating backed on steel. Interior pilasters are "regular" type. Interior shelves are white coated steel wire. Door locks standard (except KR12). Casters are standard.

REFRIGERATION

Unit's system is located at bottom of cabinet. A capillary tube is used to meter R134A refrigerant between condenser and high humidity, coated evaporator coil. Temperature control is located inside top of cabinet.

AIR DISTRIBUTION:

Beverage-Air's unique down-duct air distribution provides the ideal environment for food preservation. Refrigerated air is discharged from an evaporator coil compartment located at the interior top of cabinet. Air is discharged down rear of cabinet. Air is returned upward across the full width of the interior front assuring even temperatures throughout the cabinet



RI18



KR74



KR36



KR48



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.



Made in USA
<http://www.Beverage-Air.com>
<http://www.CCR.Carrier.com>



PO Box 5932, Spartanburg, SC 29304
 1-800-845-9800 Fax No. 1-864-582-5083

Model Specified _____ Project # _____

Location _____ Quantity _____



BEVERAGE-AIR


Reach-In Refrigerators

MODELS: KR12, KR24, KR36, KR48, KR74, RI18


DIMENSIONS

SPECIFICATIONS


MODEL	KR12	KR24	KR36	KR48	KR74	RI18
DIMENSIONAL DATA						
Net Capacity (cubic ft.)	12	20.7	31.75	44.9	69.2	13.3
Net Capacity (liters)	340	586	899	1272	1960	377
Width (inches)	24"	26"	39"	52"	78"	27 1/4"
Width (mm)	610	660	991	1321	1981	692
Depth (inches) - Overhandle	23 3/4"	32"	32"	32"	32"	27 1/2"
Depth (mm) - Overhandle	603	813	813	813	813	692
Height (inches)	65"	82 1/2"	82 1/2"	82 1/2"	82 1/2"	73"
Height (mm)	1651	2096	2096	2096	2096	1854
Number of sections	1	1	2	2	3	2
Number of shelves	3	4	8	8	12	4
ELECTRICAL DATA						
Volts	115	115	115	115	115	115
Amps	5.0	5.5	9.4	9.4	10.5	6.6
REFRIG. DATA						
Refrigerant	R134A	R134A	R134A	R134A	R134A	R134A
Horsepower	1/5	1/4	1/3	1/3	1/2	1/4
WEIGHT DATA						
Gross Weight (Crated lbs)	350 lbs	350 lbs	500 lbs	521 lbs	680 lbs	338 lbs
Gross Weight (Crated kg)	159	159	227	237	309	153




KR12 TOP VIEW




KR24 TOP VIEW




KR36 TOP VIEW




KR48 TOP VIEW

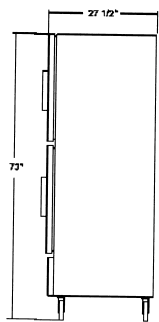


RI18 END

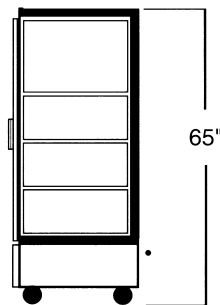


KR 12 END

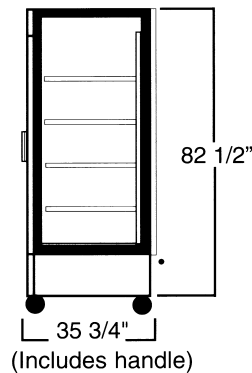

KR24, 36, 48, 74 END

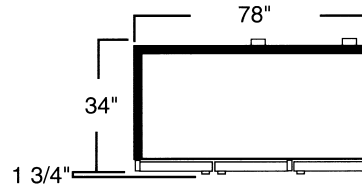

KR74 TOP VIEW



RI18 FRONT VIEW

Available From:



BEVERAGE-AIR

PO Box 5932 • Spartanburg, SC • 29304 • USA
 1-800-845-9800 • Fax No. 1-864-582-5083
 www.Beverage-Air.com
 www.CCR.Carrier.com



BEVERAGE-AIR

Item No _____

Quantity _____

REACH-IN
FREEZERS

KSeries™

MODELS:

KF12

KF24

KF36

KF48

KF74

COMMERCIAL REFRIGERATION EQUIPMENT GENERAL SPECIFICATIONS

K-SERIES KOOLATEER

CONSTRUCTION:

Heavy duty construction includes stainless front (doors and grilles) with #3 finish. Exterior sides are steel with gray finish. Exterior top, back, and bottom are galvanized steel. Exterior mounted thermometer is drum type. Interior of cabinet is white coating baked on steel. Interior pilasters are "regular" type. Interior shelves are white coated steel wire. Door locks standard (except KF12). Casters are standard.

REFRIGERATION:

Unit's system is located at bottom of cabinet. Defrosting is accomplished with electric heaters. Defrost is time initiated, temperature terminated. A time termination is provided as a back up fail-safe. Evaporator fans are delayed from restarting until evaporator coil is adequately chilled down. Operation of compressor is governed by temperature control inside top of cabinet.

AIR DISTRIBUTION:

Beverage-Air's unique air distribution provides the ideal environment for food preservation. Refrigerated air is discharged from an evaporator coil compartment located at the interior top of cabinet. Air is discharged down the rear of cabinet. Air is returned upward across the full width of the interior front assuring even temperatures throughout the cabinet.



KF12



KF24



KF36



KF74



KF48



Choose energy-efficient products with the ENERGY STAR® label. It's an easy way to protect the environment while also saving money.

C-UL optional with disconnect switch



Made in USA
<http://www.Beverage-Air.com>
<http://CCR.Carrier.com>



BEVERAGE-AIR

PO BOX 5932, Spartanburg, SC 29304-5932
1-800-845-9800 Fax # 864-582-5083

File # _____


Spec. _____



BEVERAGE-AIR

**KF12, KF24, KF36, KF48, KF74
Reach-In Freezers**

DIMENSIONS

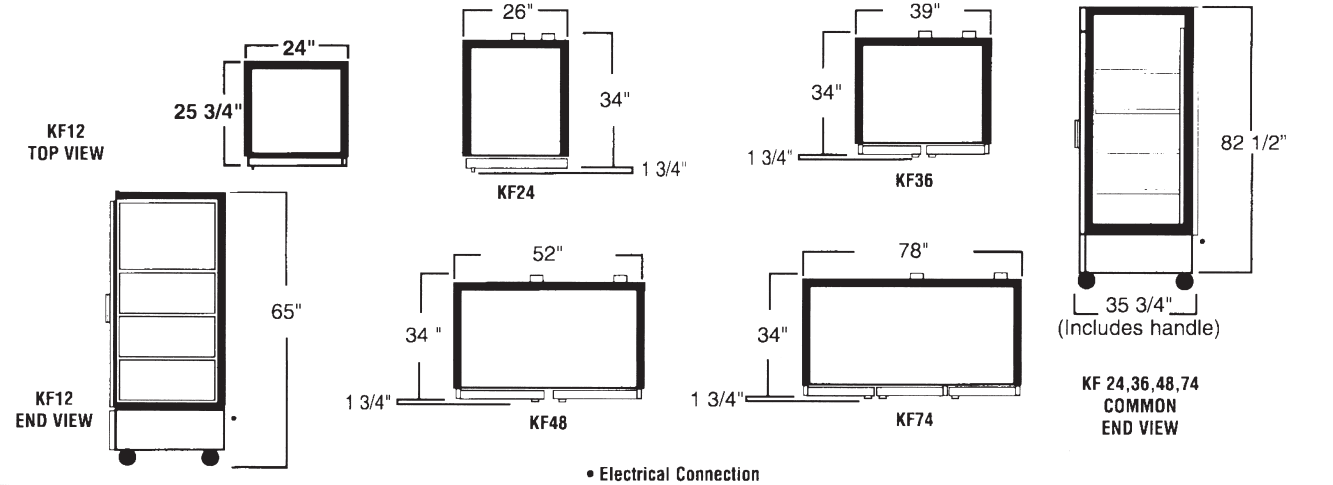

SPECIFICATIONS KF12

	SOLID DOOR
Exterior Width	24"
Exterior Depth, Overhandle	25 3/4"
Exterior Height, With Legs	65"
Cubic Feet	12
Cabinet Voltage (50 Cycle Available)	115
Horsepower	1/2
Amps	9.8
-20/120 BTU/HR*	1428
Crated Weight	260
Shelves	3
Shelf Dimension	18 3/4" x 20 3/4"

SPECIFICATIONS KF24

	SOLID DOOR
Exterior Width	26"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	20.7
Cabinet Voltage (50 Cycle Available)	115
Horsepower	3/4
Amps	11.0
-20/120 BTU/HR*	1920
Crated Weight	375
Shelves	4
Shelf Dimension	22 3/8" x 21 1/8"

SPECIFICATIONS KF36

	SOLID DOOR
Exterior Width	39"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	31.75
Cabinet Voltage (50 Cycle Available)	115
Horsepower	3/4
Amps	11.0
-20/120 BTU/HR*	1920
Crated Weight	550
Shelves	8
Shelf Dimension	22 3/8" x 16 1/4"

KF-1224364874BW

SPECIFICATIONS KF48

	SOLID DOOR
Exterior Width	52"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	44.9
Cabinet Voltage (50 Cycle Available)	115
Horsepower	3/4
Amps	12.5
-20/120 BTU/HR*	2600
Crated Weight	585
Shelves	8
Shelf Dimension	22 3/8" x 22 3/4"

SPECIFICATIONS KF74

	SOLID DOOR
Exterior Width	78"
Exterior Depth, Overhandle	35 3/4"
Exterior Height, With Legs	79 1/4"
Cubic Feet	69.2
Cabinet Voltage (50 Cycle Available)	115/208-230v 60 Hz
Horsepower	1
Amps	10.5
-20/120 BTU/HR*	4000
Crated Weight	690
Shelves	12
Shelf Dimension R.H./L.H. Center	22 3/8" x 22 3/4" 22 3/8" x 24 3/8"



BEVERAGE-AIR

PO BOX 5932, Spartanburg, SC 29304-5932
1-800-845-9800 Fax # 864-582-5083
ECPC-135451-4/03